
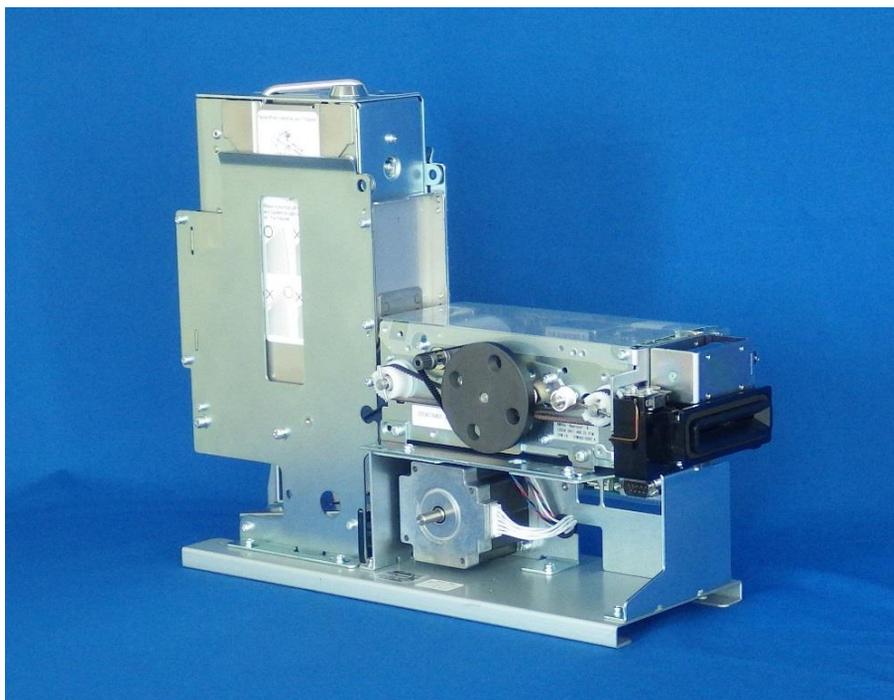


## Card Dispenser SCT3Q8-3A7340



### Application

- Instant card issuing terminal

### Features

- Max. card capacity up to 120 -150 flat cards with security cassette
- High reliability of unique card carrier system
- Reject stacker for error card up to 20 cards
- Near-end detect function

### Specification

Magnetic stripe			IC card			Interface	Power supply	Dimensions (mm)		
ISO/IEC 7811			ISO/IEC 7816	Protocol handling	EMV			W	D	H
Tr. 1	Tr. 2	Tr. 3								
R/W	R/W	R/W	R/W	T=0,1	Level 1 Ver. 4.0 approved	RS232C	+24V DC	115	364	275

R/W : Read & Write